




POSTS ACCESSORIES

This anchoring system is specially designed for use on medium-hard terrain.

The base reinforcement guarantees optimum support.

The fixing rod may have a looped disk end or a button disk end.

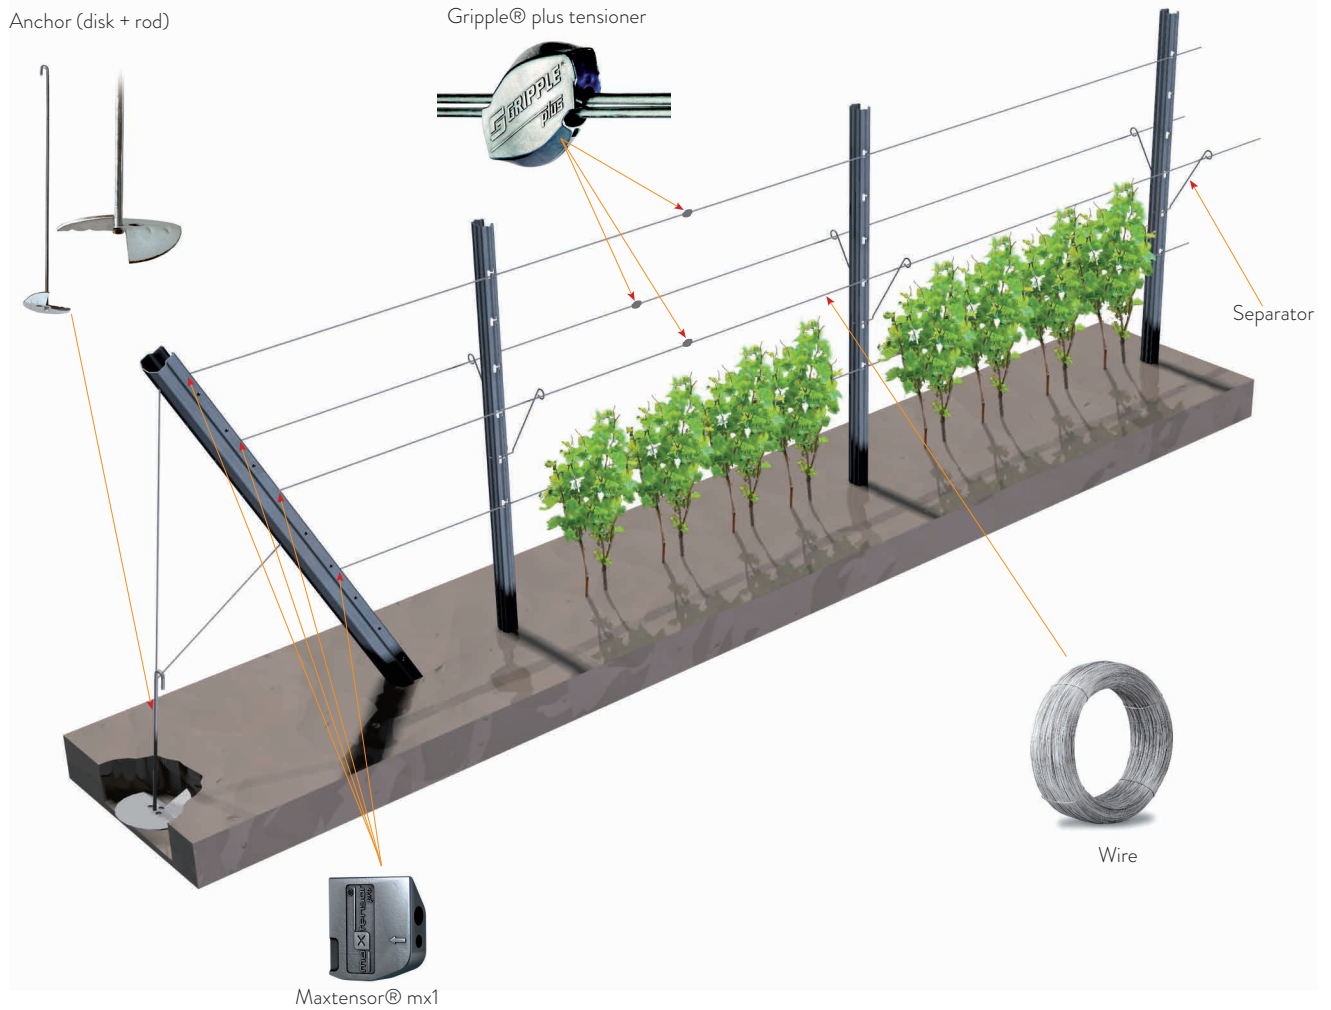

HELICAL ANCHORS

BUTTON

- **Disc thickness:** 2.5 and 3 mm.
- **Disc diameter:** 107 mm. / 125 mm. / 150 mm.
- **Rod thickness:** 7 mm.
- **Rod lengths:** 600 mm. / 800 mm. / 1000 mm.
- **Rod ending:** button.



LOOP



- **Disc thickness:** 2.5 and 3 mm.
- **Disc diameter:** 107 mm / 125 mm / 150 mm.
- **Rod thickness:** 7mm.
- **Rod lengths:** 600 mm / 800 mm / 1000 mm.
- **Rod ending:** ribbon.



TENSIONERS

These products, from the Gripple® and Maxtensor® brands, are easy and quick to use, and they allow the user to join or tension wires from 2 to 3 mm. High load retention.

They also allow adjustment and loosening to raise the crops each season. Easy to maintain and excellent resistance to corrosion.

GRIPPLE® PLUS MEDIUM

Wire diameter: 2.00 - 3.25 mm.

Load in kg: 400 Kg.



MAX TENSOR® PRO MX1

Wire diameter: 1.8 and 3.0 mm.


Load in kg: 400 Kg.



RATCHET TENSIONER

Wire diameter: 2.00 and 3.25 mm.

Load in kg: 400 Kg.

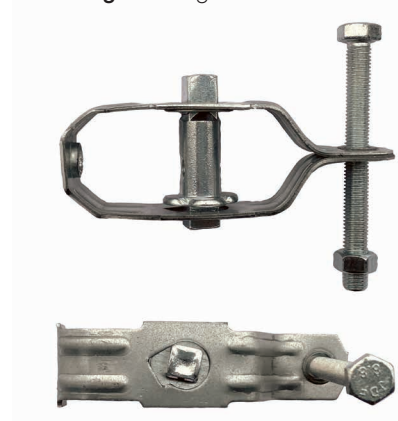

DELTEX® WIRE, FIXATIVE AND THREAD

WIRE


Characteristics: Triple galvanized wire.

Diameters: 2.0 , 2.2, 2.4, 2.7mm.



CLIP

Exclusive clip for our posts, which allows the Deltex® wire to be placed and easily adjusted each season.

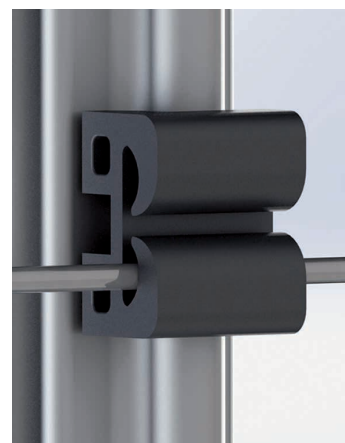



C/ Persiles y Segismunda, s/n · 45221 Esquivias / Toledo / Spain
Phone: +34 925 520 035
www.magon.es
magonaceros@magon.es

This document is not a safety manual.

The content and recommendations in the catalogue are informative and non-binding.

MAGON METALES PERFILADOS S.A. reserves the right to modify the contents of this document without prior notice.

General Sales Conditions available on our website www.magon.es