



END
POSTS

Our manufacturing system allows you to choose your own layouts of fixing holes and their position. It is thus possible to manufacture a wide range of combinations of holes in order to suit the needs of our customers.

Holes in offset position: this hole pattern has sets of holes facing each other with the second set offset 50 mm. from the first.

Holes in parallel position: this layout has sets of holes facing each other from either side of the post in a parallel pattern, i.e. a mirror image layout.

Holes in mixed positions: in choosing this option for the layout of the holes, we are specifying that there will be sets of holes that face their opposite sets in a parallel pattern, with other sets in the offset pattern.

Four different punched holes can be manufactured.

We can manufacture with a single type of hole per post, or combinable on request, subject to a minimum order.

Central punching may be available on request.

Available punched holes (T)



"H"
punched hole



"N"
punched hole



"U"
punched hole



Arrowhead
punched hole





Hooks



Central
punched hole




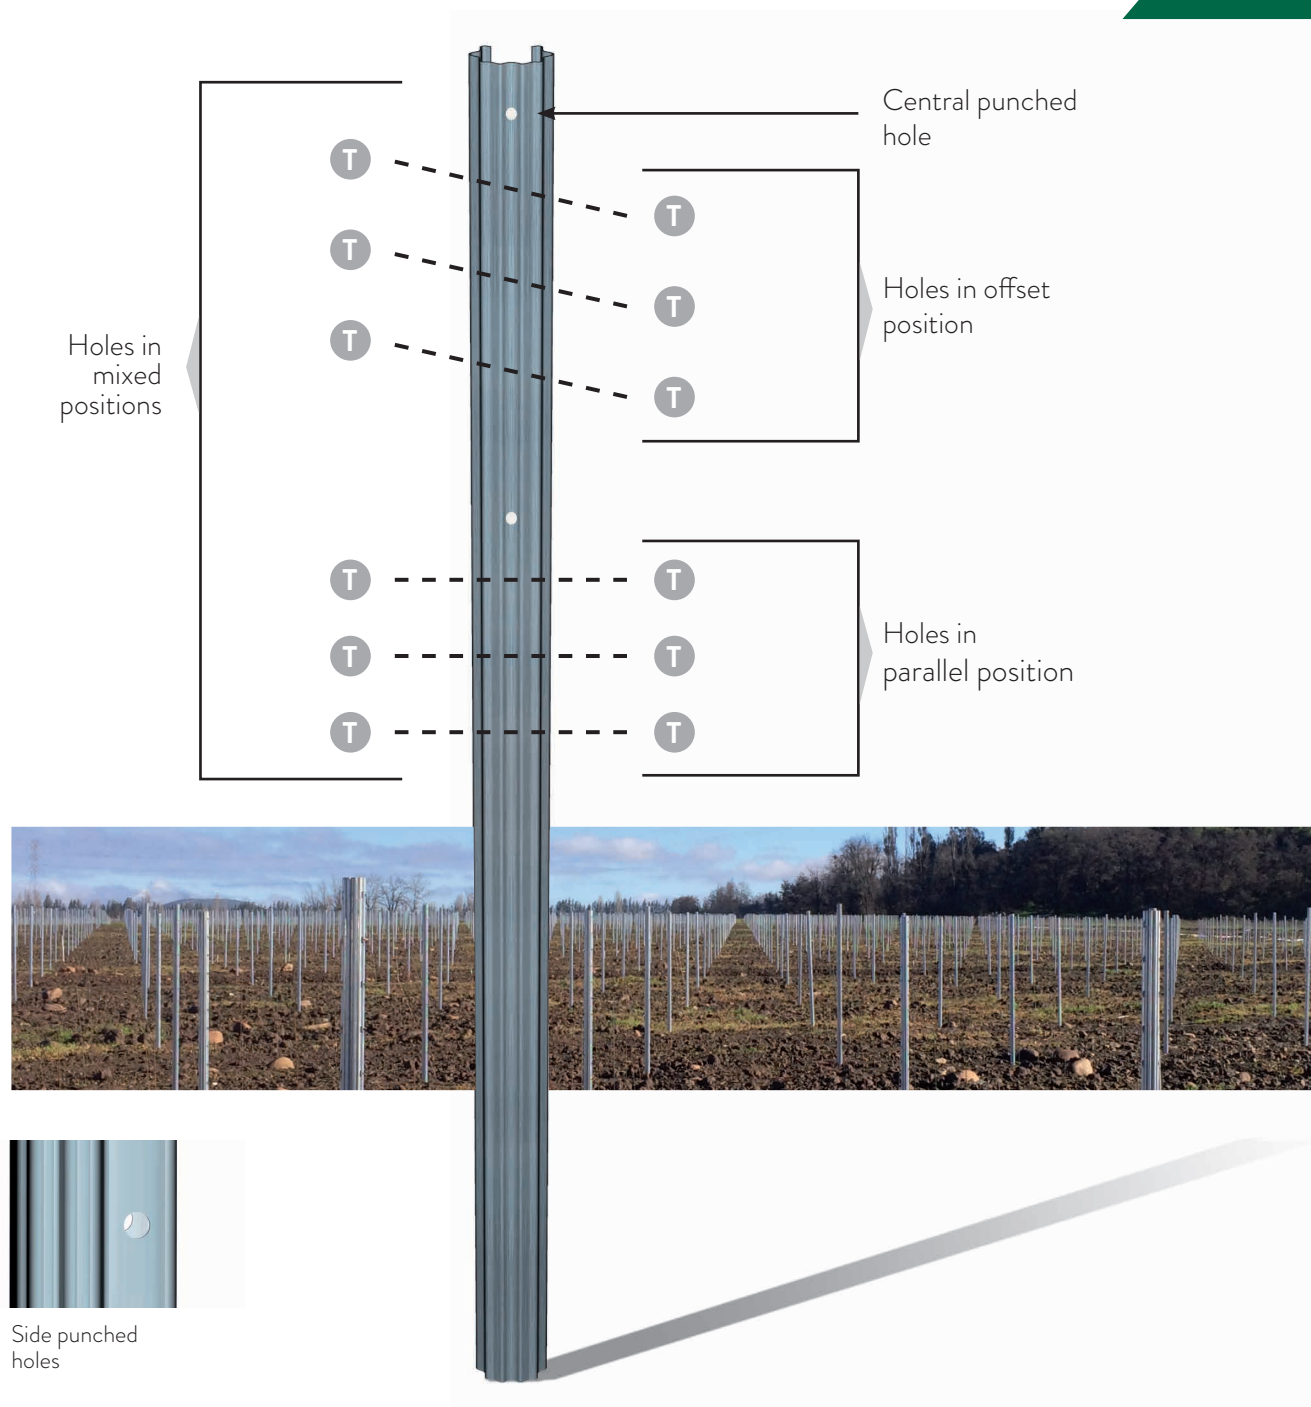



PUNCHED HOLES:

CENTRAL AND SIDE PUNCHED

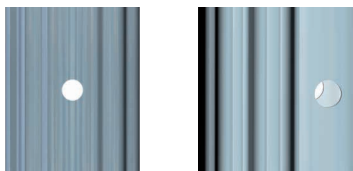


MG 48

- **Steel quality and coating:** S250GD + Z275.
- **Other coatings:** Magnelis, Corten.
- **Dimensions:** height: 48mm / width: 51mm.
- **Possible thicknesses:** 1.8mm and 2.0mm.
- **Typical lengths:** 2000mm, 2200mm and 2400mm. Other lengths on request.
- **Distance between holes:** 100mm.
- **Standard packaging:** 100 units with nylon straps and disposable slings.
- **Manufacturing standards:** 10143: 2007 and 10346: 2015.
- **Most common use:** vineyards, super-intensive olive groves and fruit orchards.


VIRTUES:

End post ideal for medium loads specially designed to facilitate installation in any type of terrain. It is one of the most commonly used posts due to its strength and versatility.



PUNCHED HOLES:

CENTRAL AND SIDE PUNCHED HOLES

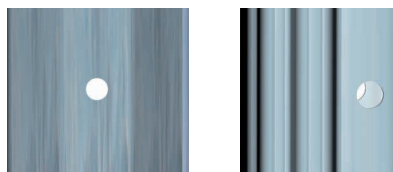

MG 58

- **Steel quality and coating:** S250GD + Z275.
- **Other coatings:** Magnelis, Corten.
- **Dimensions:** height: 58mm / width: 67mm.
- **Possible thicknesses:** 1.8mm and 2.0mm.
- **Typical lengths:** 2000mm, 2200mm and 2400mm. Other lengths available on request.
- **Distance between holes:** 100mm.
- **Standard packaging:** 100 units with nylon strap and disposable slings.
- **Manufacturing standards:** 10143: 2007 and 10346: 2015.
- **Most common use:** vineyards and fruit orchards.

BENEFITS:

An end post ideal for large loads specially designed to facilitate installation in any type of terrain. Due to its substantial width, it provides strong support both for vineyards and fruit orchards.



C/ Persiles y Segismunda, s/n • 45221 Esquivias / Toledo / Spain
Phone: +34 925 520 035
www.magon.es
magonaceros@magon.es

This document is not a safety manual.

The content and recommendations in the catalogue are informative and non-binding.

MAGON METALES PERFILADOS S.A. reserves the right to modify the contents of this document without prior notice.

General Sales Conditions available on our website www.magon.es