


MG 14/200




www.magon.es

Known as a door profile slat, it perfectly imitates wooden slats and has numerous applications, among which are: the manufacturing of doors, ceilings, side and eaves, shutters and fences. It is a high performance product, resistant and very easy to install. We also provide an assembly system which allows all screws to remain hidden, achieving a unique look for both vertical and horizontal installations. It is also offered in a perforated finish with different configurations.

CE certified product according to the UNE-EN 14782: 2006 standard.

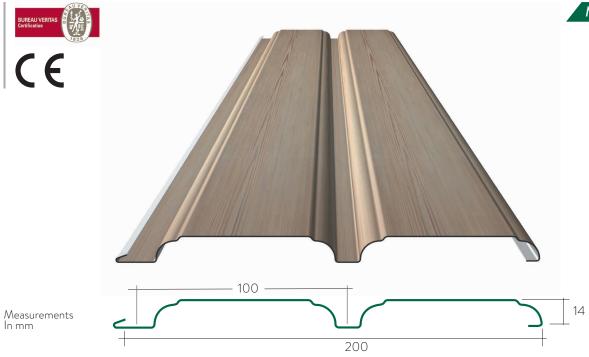

JOINT DETAIL

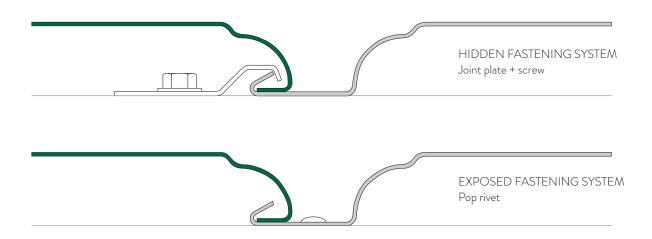

FINISHES

This profile is manufactured from cold-formed coated steel sheets according to the following standards:

- · Organic coating (UNE-EN10169): Polyester, PVDF, HDX, HPS.
- Metallic coating (UNE-EN10346): Galvanized.
- · Cold rolled.
- · Other finishes on request.

TECHNICAL FEATURES

- End use: Manufacturing doors, ceilings and cladding.
- **Steel type:** Standard S250GD (other types of steel on request).
- · Rib height: 14 mm.

- · Rib spacing: 100 mm.
- · Usable width: 200 mm.
- Thickness: From 0.6mm to 0.8mm.
- Length: On request (maximum 10 m).



C/ Persiles y Segismunda, s/n • 45221 Esquivias / Toledo / Spain Phone: +34 925 520 035 www.magon.es magonaceros@magon.es

This document is not a safety manual.

The content and recommendations in the catalogue are informative and non-binding.

MAGON METALES PERFILADOS S.A. reserves the right to modify the contents of this document without prior notice.

General Sales Conditions available on our website www.magon.es

MGCI.22.1